

RACING SHELL ORDER FORM

CLUB/CLIENT: _____

CONTACT PERSON & DIRECT TEL.: _____

TEL.: _____ FAX: _____ E-MAIL: _____

TYPE OF BOAT: _____ AVERAGE ROWERS' WEIGHT IN KG _____ HULL NR. _____

TRADITIONAL (STANDARD ALU. EURO RIGGERS) **WING** (ELLIPTICAL ALU. WING) **CARBON** (CARBON FIBER MONTUBES)

SEAT TRACK LENGTH (CM): standard cm. 80 other _____

SEAT: Double-action Single-action (ball-bearing wheels)

OARLOCKS: Salani CROKER originals

STEERING: left foot right foot at seat nr.*: _____

COXSWAIN: Bow-coxed Stern-coxed

BOAT DIVISION: longest section 12 m other _____

SHOES SIZES BY SEAT NUMBER*:

#1: _____ #2: _____ #3: _____ #4: _____ #5: _____ #6: _____ #7: _____ #8: _____

** SEAT NUMBERING IN ITALY STARTS AT THE STERN (STROKE SEAT IS #1)*

MAX FOOTSTRETCHER ANGLE: 45° 42° 38° other _____

HEEL DEPTH: cm. _____

WORK HEIGHT MEASURED FROM SEAT (A):

Sculling Riggers min height (port) cm _____

Sculling Riggers max height (port) cm _____

Sculling Riggers min height (starb.) cm _____

Sculling Riggers max height (starb.) cm _____

Sweep Riggers min height (port) cm _____

Sweep Riggers min height (starb) cm _____

SPREAD (B):

Sculling Riggers min aperture (cm) _____

Sweep Riggers min aperture (cm) _____

PIN TOWARDS BOW CM: _____

LATERAL SPLAY (SCULLING RIGGERS) _____° LATERAL SPLAY (SWEEP RIGGERS) _____°


OPTIONALS:

STROKE COACH SPEED COACH COX BOX PREDISPOSITION ONLY FOR STROKE COACH

GUIDE AUSSIEGLIDE PINS >20CM CUSTOM FINISH NEOPRENE SEAT PAD

SPECIAL REQUESTS OR EXPLANATIONS:

Date:	Name and stamp:
-------	-----------------

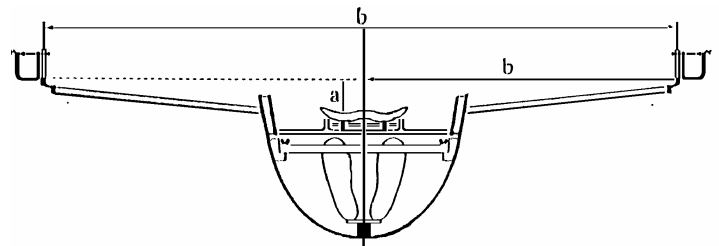

Sweep Riggers max height (port) cm _____

Sweep Riggers max height (starb.) cm _____

Sculling Riggers max aperture (cm) _____

Sweep Riggers max aperture (cm) _____

Requested delivery date: